

ETS Inc. SM1-TRWCF Microphone Instructions

The SM1- is a high quality, 12VDC-24VDC powered, compact, tamper resistant, weather proof (IP55), surface mount, omni-directional, pre-amplified microphone for use with DRVs, I/P cameras, etc. Note- the audio output of the SM1-TRWCF is “line level” (0db).

SM1-TRWCF Microphone Placement

The SM1-TRWCF is designed for outdoor applications and can be mounted on any flat surface using the supplied tamper resistant screws. Do not mount the microphone near air conditioning vents, light fixtures or electrical equipment. We recommend pointing the microphone towards the ground so that water does not accumulate in the sound hole. The SM1-TRWCF should be placed as close as possible to the subject of interest. The SM1-TRWCF is useable in the range of 3-25 feet but is dependent on the level of background noise in the area. Experimentation in the environment will determine what distances work best.

Cable Run

Run a 22 gauge, stranded, two conductor shielded cable between the SM1-TRWCF microphone and the monitoring device. Keep the cable run distance under 1,000 feet and away from AC power sources, light fixtures and electrical equipment. Connect power to the + terminal, the audio signal to the “audio” terminal and ground to the – terminal. The Ground of the power and audio signal must share a common ground for proper operation. See *Figure 1 for connection diagram*.

Adjusting the SM1-TRWCF Gain

The SM1-TRWCF has an adjustable output level. The SM1-TRWCF is shipped with the gain set at midrange. If the sound at the “head end” is distorted, rotate the control counter-clockwise. If the volume at the “head end” is too low, rotate the control clockwise.

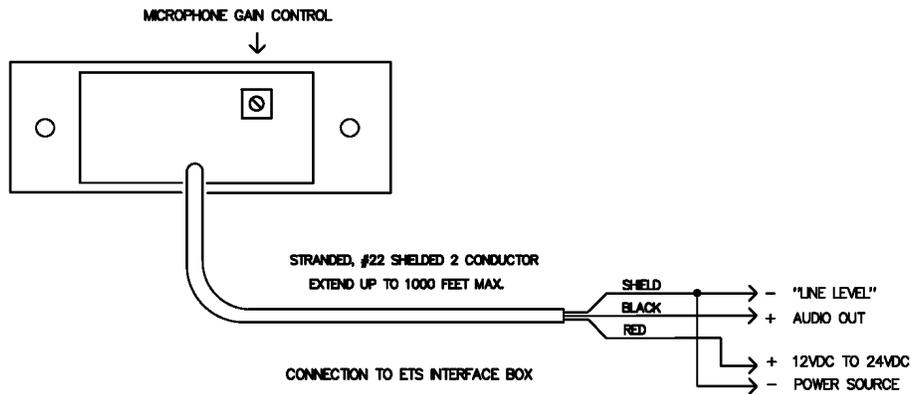
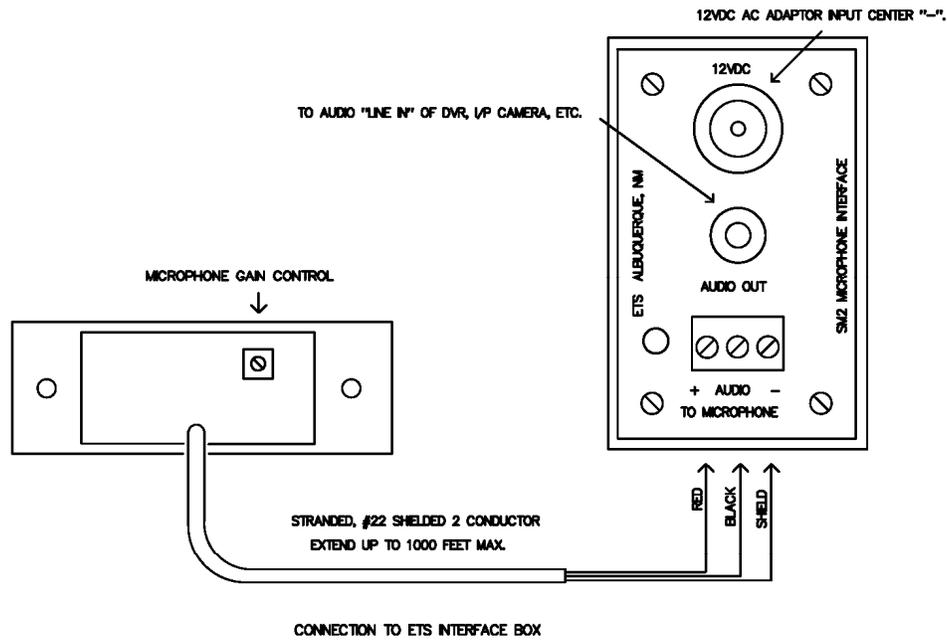


Figure 1.

Caution

It may be against the law to install this microphone kit in certain environments. It may also be against the law to record conversations of the person(s) being monitored without their knowledge. It is the responsibility of the installation company and end-user to determine if the application of this product is legal. These laws vary from state to state. If you are not informed on these matters, consult a qualified attorney or contact the appropriate state agency. A sticker is provided with this kit for the applications where notification must be posted.

Warranty

All ETS products carry a one year parts and labor warranty. This warranty does not cover damages as a result of misuse, improper handling of the unit or exposure to extreme temperatures or moisture. At its discretion, ETS reserves the right to repair or replace this unit under the conditions of the warranty. If you experience problems with your equipment call ETS at: 505-888-3923 to obtain a return authorization number. Equipment requiring repair beyond the warranty period or units that have been damaged or are not covered under the warranty can be repaired by ETS for a minimal cost under most conditions.