



Electronic Technical Services Inc.
211 Conchas SE
Albuquerque, NM 87123
PH 505-888-3923 FAX 505-888-3926
Website: www.etsnm.com


Sound Surveillance™

ML1-BPM Panel Mount, Weather Proof, Vandal resistant, Uni-directional Microphone

Description

The ML1-BPM is a low cost, Vandal resistant, boundary type, uni-directional electret, IP67 rated microphone for use with IP cameras accepting **microphone level input** signals (PC compatible input). The attached cord is 6' long and comes standard with a flying lead output for connections to cameras with terminal blocks.

For use with IP cameras accepting microphone level inputs (the camera supplies power to ECM cartridge)

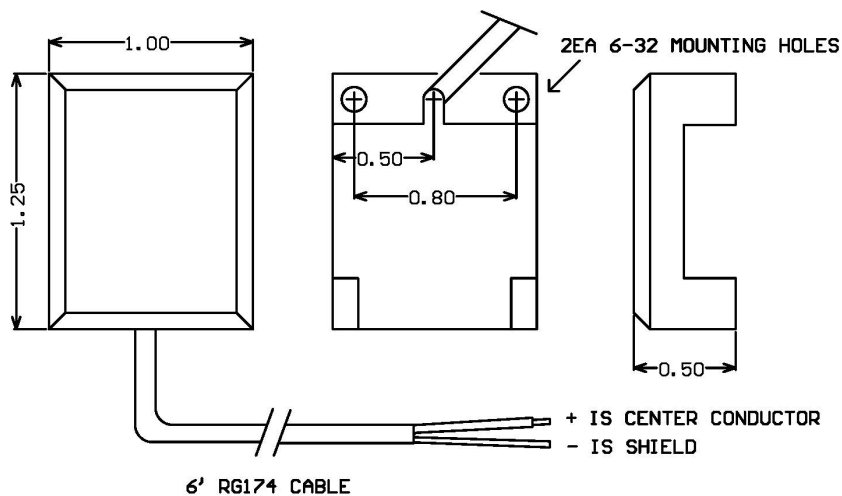

ML1-BPM Specifications

- Uni-directional pattern
- Max SPL 120db
- Frequency response: 150-16khz
- Sensitivity -54db
- -40db output (mic level)
- 2-10Vdc operation
- 680-5k Ohm load resistance
- S/N 60db
- 6' standard cable length
- Flying leads output
- Clear matte finish aluminum housing
- Operating temperature -40 to 85C
- IP67 rated
- Built in windscreen
- Dimensions: L1.25 x W1.00 x H0.50
- Weight: 0.025 kg

Includes

- ML1-BPM microphone.
- Warning label.

Options

- Cable lengths of up to 25' are available. Add -XX to P/N where XX = number of feet
- Add -BL for black powder coating, or -WT for white powder coating
- Add -LN for low noise high sensitivity capsule

Caution

It is the responsibility of the installation company and end user to install this audio surveillance equipment in compliance with state and federal privacy laws. If you are unfamiliar with these laws, consult a qualified attorney.

Warranty 1 year parts and labor,

Made in USA