




Electronic Technical Services Inc.
211 Conchas SE
Albuquerque, NM 87123
PH 505-888-3923 FAX 505-888-3926
Website: www.etsnm.com

UMB-1SS USB Microphone

Description

The UMB-1SS is a high performance USB surveillance microphone typically for use in interview room applications. The UMB-1SS features adjustable hi / low cut filters and an ALC for optimum control over sound quality. UMB-1SS Can be connected to a PC USB input via an off the shelf USB mini B to USB cable, a 4 conductor shielded cable or a Cat5/6 ethernet cable.

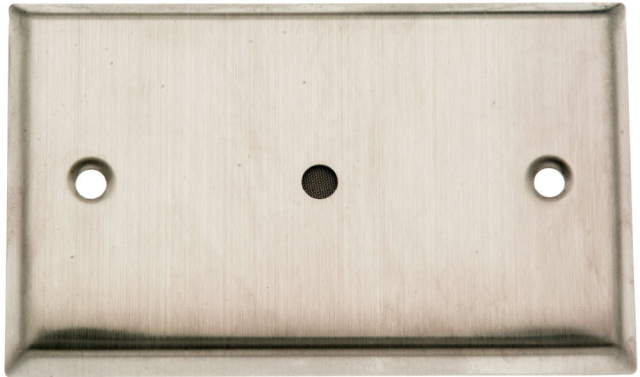

Includes

- UMB-1SS Microphone
- USB A to Terminal Block adaptor
- Installation instructions.

Options

- Cat5/6 version available P/N UMB-1-C5
- Add -LN to part number for low noise, high sensitivity capsule option.
- Available in all other ETS microphone form factors. Contact us for more information

Warranty

1 year parts and labor.

Made in USA

UMB-1SS Specifications

- Omni-directional 25' pickup pattern
- Low noise MOSFET pre-amplifier.
- 500Hz-16Khz Frequency response (hi-cut and lo-cut off)
- Adjustable lo-cut filter: (500hz to 1Khz)
- Adjustable hi-cut filter: (5Khz to 16Kz)
- Adjustable automatic level control. (compression range 1:1-10:1).
- Master volume (level) control
- Uses default windows driver.
- USB B mini connector for cable runs upto 30'.
- Terminal blocks for connecting cable run OR cat5/6 option for using ethernet cable.
- USB A to terminal block or USB A to Cat 5/6 adapter included
- S/N ratio: more than 60DB (80db -LN option)
- Sensitivity -45DB (-28db -LN option)
- Power: USB 5v, 25ma
- RFI filtering.
- Temperature range: -10C to 85C
- Dimensions: L 4.7" x W 2.9" H 0.9"
- Stainless steel single gang plate
- Weight .04lbs