Electronic Technical Services Inc.
211 Conchas SE
Albuquerque, NM 87123
PH 505-888-3923 FAX 505-888-3926
Website: www.etsnm.com

Sound Surveillance [tm]


ML1-PD Right Angle Panel Mount, Weather Resistant, Tamper Resistant, Omni-directional Microphone

Description

The ML1-PD is a high performance, low, cost omni-directional, IP54 rated electret microphone for use with IP cameras accepting microphone level input signals (PC compatible input). This microphone differs from others in that the audio input port points down which helps keep water out of it. The attached cord is 6' long and comes standard with a stereo 3.5mm connector on one end. Add -FL to the P/N for a flying lead output for connections to cameras with terminal blocks.



For use with IP cameras accepting microphone level inputs (the camera supplies power to ECM cartridge)

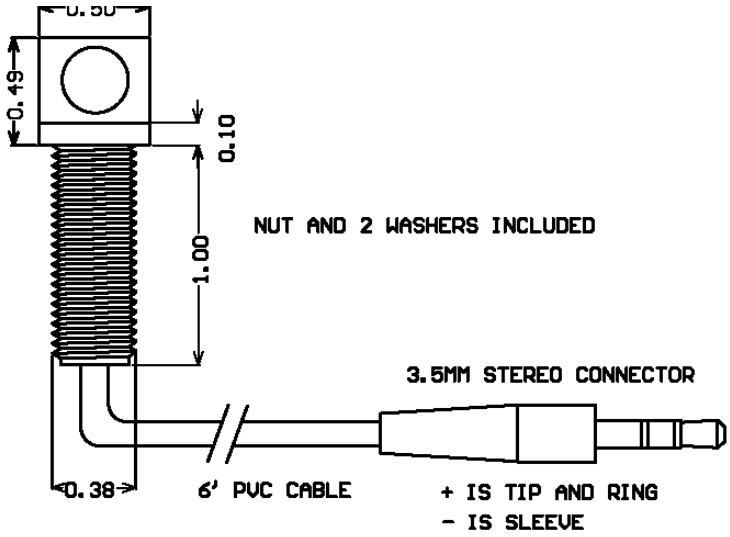

ML1-PD Specifications

- Omni-directional pattern
- Max SPL 120db
- Frequency response: 40-17khz
- Sensitivity –44db (-28db –LN capsule)
- -40db output (mic level)
- 2-10Vdc operation
- 2-5k Ohm load resistance
- S/N 60db (80db –LN capsule)
- Max SPL 115db
- 6' standard cable length
- 3.5mm stereo connector
- Anodized aluminum housing
- IP54 rated
- Operating temperature –30 to 70C
- Weight: 0.025 lbs

Caution

It is the responsibility of the installation company and end user to install this audio surveillance equipment in compliance with state and federal privacy laws. If you are unfamiliar with these laws, consult a qualified attorney.

Includes

- ML1-PD microphone.
- Warning label.
- Mounting locknut and 2 washers.

Options:

- Cable lengths of up to 25' are available.
  Add –XX to P/N where XX = number of feet
- Add –FL to P/N for flying lead output
- Add -LN to P/N for higher performance capsule

Warranty *1 year parts and labor,* *Made in USA*